




PLAST-PACK

2.5L 157 LT

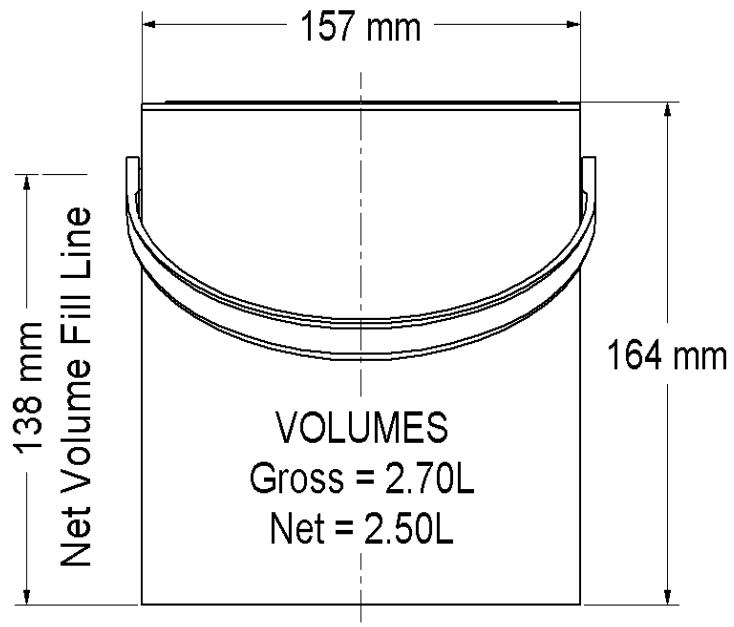

SPECIFICATION

LID

157 U Lid (Gasket Seal available for products with lower viscosity than Emulsion)

Plastic

HANDLE TYPE

Polypropylene Co-Polymer Food Grade

MATERIAL

White – Contact Clear available on request

COLOUR

Container 146 (+/- 8g) Lid 27g (+/-4g)

WEIGHT

Containers 343 per pallet (plt 1000mm x 1200mm)

QUANTITY (Empty)

Lids 3920 per pallet (2 boxes)

STACKING (Empty)

Containers: 5 pallets high (weight per plt 71 kgs)
Lids in Boxes: 3 pallets high

FILLING

(Based on Product Density 1.4,
Air Temperature 20 °C)

147 Per Pallet (49 per layer x 3 high)

635 mm Maximum Pallet Height

See accompanying page for **Filled Container Specification**
RPC strongly recommend that Stacking Trials be conducted using the appropriate
Product under Normal conditions

FILL TEMPERATURE

Max 70°C (avoid prolonged exposure over 40 °C & below 0 °C)

DECORATION

Off-Set Printing in up to 6 cols

In Mould & Post Mould Label Options Available

Key Lines Available on Request

*WE RECOMMEND THAT YOU CONSULT OUR DECORATION
ADVISORY SERVICE BEFORE BRIEFING YOUR DESIGNER*

COMPATABILITY

It is the responsibility of our customers to ensure their product is compatible with the container. Trials can be carried out by RPC on request.


Notes: Details given in this Data Sheet are correct at time of going to press. Further details can be found on the General Information Sheet. However for applications where these are critical please consult our Technical Staff.

RPC CONTAINERS LTD

FILLED CONTAINER

RECOMMENDED STACKING PATTERN

PALLET LAYOUT

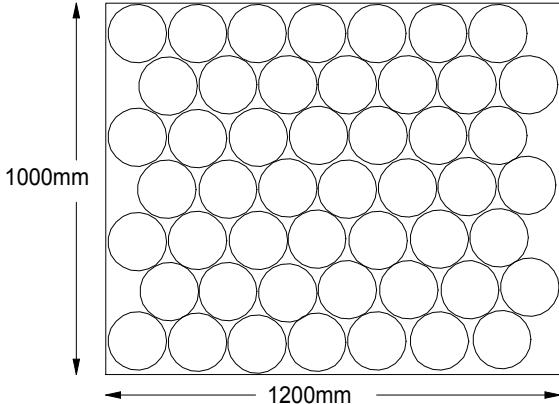

49 CONTAINERS

EACH LAYER

3 LAYERS

EACH PALLET

TOTAL PALLET


QTY 147

Paintainer Range

2.5 LITRE 157 LIGHTAINER

DATE. Nov 96

STATIC LOAD TWO PALLETS HIGH

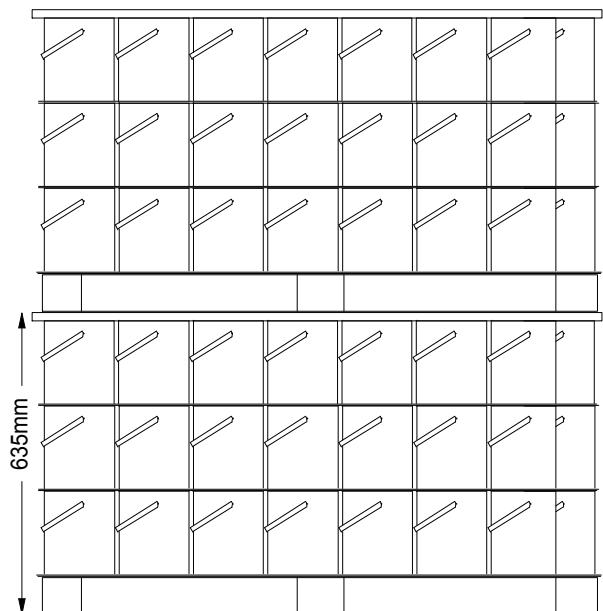

STACKABILITY

All Data given assumes a Product Density of 1.4 and an Air Temperature of 20'C. The Maximum height of Pallets holding filled Lightainers is 2. Use a Layer Pad between each Layer of Lightainers. It is Recommended that Pallets of Filled Lightainers should be Banded, Shrink Wrapped or Stretch Wrapped with a 10mm Spreader Board over the top layer, it is also recommended that the Shrink Wrap or Stretch Wrapping is securely located around the four sides of the Pallet.

TEMPERATURE

Filling temperature: Polypropylene 70'C Max.

NB: Stacking performance is affected by temperature therefore do not Lid and Stack until product has cooled.

Avoid prolonged exposure over 40'C and below 0'C.

N.B. RPC Recommend that Stacking Trials are conducted using the appropriate Product Under normal conditions

For all other details related to our products please refer to the RPC Publicity Brochure or our Technical Staff.

FIL2157L